



N35.125
GRAFTER 
GREEN



specifications:

Isuzu 'Grafter Green' N35.125(T) Utilitruck

3.5T GVW / EURO 6 4x2 rigid twin rear wheels



Axle weights (kg)		
UK maximum Vehicle Weights (kg)	GVW	3500
	GTW*	7000
UK Axle design weights (kg)	Front	2100
	Rear	2435

Weights (kg)		
Cab type		day
Wheelbase	WB	3350
Vehicle Mass Unladen	Front	1550
	Rear	990
Total		2540
GVW		3500
Payload Allowance		960
Max. Permissible Trailer Weight*		3500

Dimensions (mm)			
Body Length	OAL	External Body Length	3400
		Internal Body Length	3300
Body Width	OVW	External Body Width	1950
		Internal Body Width	1890
Full size toolpod with galvanised steel end frames		Toolpod Height	1460
Includes aluminium roller shutter with hasp & staple		Toolpod Length	1900
Internal single width shelf at half height		Toolpod Width	800

Features	
Fully galvanised steel sub frames	Fully galvanised steel tipping gear
Multistage direct lift under floor ram	Wander lead control complete with 'Body Up' warning light
Dual tone audible warning buzzer	Electro hydraulic power pack with thermoplastic oil reservoir
Hose burst safety valve	Rubber moulded body rests
Fully galvanised gantry with mesh cab protection and infill panel and 'Isuzu' logo	18mm alloy 'Tippadeck' heavy duty interlocking floor system
Single 400mm high alloy mill finish drop side boards c/w recessed spring catches	400mm high alloy mill finish tailboard with 2-way hinge assembly and rubber stops
Fully galvanised heavy duty removable corner posts	Heavy duty under floor tie points either side
Half round thermoplastic mud wings	Integral body prop
Safety decals and colour instruction manual	Front and rear marker lights
Towbar with pin/ball hitch and seven pin electrics	400mm LED beacon bar

***Tachograph regulations may apply**

1. Unladen weights excludes driver and fuel. Includes spare wheel + carrier (Tolerance +/- 3%). Spare wheel and carrier 38kg.
2. Isuzu Truck (UK) Ltd. shall have no liability whatsoever should the information supplied have incorrect data, descriptions or illustrations.

N35.125(T) Utilitruck Mechanical Specification (standard equipment)




EURO 6

POWER & TORQUE

Engine	
Make & model:	RZ4E – Isuzu turbo intercooled DOHC 4 cylinder diesel. Lean NOx trap.
Bore x stroke:	80 x 94.4mm
Capacity:	Max Power:
	at 3200rpm

Transmission	
Make & model:	Isuzu 6 speed manual synchromesh MVC6W overdrive.
Ratios:	1st - 4.942; 2nd - 2.686; 3rd - 1.527; 4th - 1.000; 5th - 0.796; 6th - 0.634; Reverse - 4.597
Rear Axle Ratio:	4.777:1

Clutch	
Type:	275mm diaphragm type with hydraulic actuation.

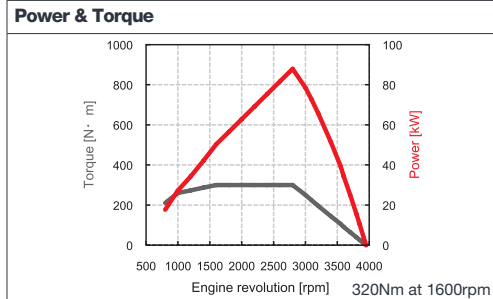

Electrical	
Type:	1 x 12V 540CCA 70Ah battery with 12V/150A alternator.

Tyres/Wheels	
Tyres:	205/75 R16 radial.
Wheels:	5.50J x 16, 5-stud.
Spare:	1 x wheel and tyre.

Frame	
Type:	Parallel ladder type channel section straight side rails, riveted upper flange.

Axles	
Front:	Independent type.
Rear:	Banjo fully floating.

Suspension	
Front:	Coil spring suspension with double wishbones and hydraulic shock absorbers.
Rear:	Semi-elliptical steel suspension with hydraulic shock absorbers.

Brakes	
System:	Vacuum servo assisted hydraulic dual line with ABS, EBD (electronic brake distribution), EVSC (electronic vehicle stability control), ASR (anti slip regulation).
Front:	293mm ventilated discs with asbestos free pads.
Rear:	275mm ventilated discs with asbestos free pads.
Park:	Mechanical drum brake rear of transmission.

Fuel Tank	
Capacity:	

CAB FEATURES

Cab Exterior	
Type:	Hexapod, white, all-steel.
Features:	Manual tilt to 45 deg. Tinted windscreen. Chrome radiator grille. Plastic resin non-slip entry steps. 90 deg. opening doors. Zinc galvanised frame structure. Steel reinforced composite front bumper with fog and daytime running lamps. Two halogen head lamps with indicators. Front mudguards with spray suppression. Keyless door entry and immobiliser.

Cab Interior	
Features:	Flame-resistant interior trim. Vinyl floor matting. Pillar mounted entrance grab handles both sides. Driver and passenger SRS airbags.

Seats (cloth)	
Features:	Driver's fully adjustable suspension seat with head restraint. Dual passenger seat with folding back. Driver and outer passenger retractable diagonal seat belts with pre-tensioner. Centre seat lap belt.

Vision	
Features:	Large foldable mirrors. Interior rear view mirror on collapsible mounting. Driver and passenger sun visors. Deep cut side windows to reduce blind spots. Electric windows with driver control and lock.

Steering	
Features:	Rack and pinion with full integral hydraulic power assistance. Tilt and telescopic steering column.

Instruments	
Features:	Speedometer with odometer & trip. Rev counter. Fuel gauge. Engine coolant temperature.

Switches & Electrical	
Features:	Combination stalk incorporating headlamps, indicators, fog lamp, washers and wipers. Steering wheel horn. Engine idle control. Headlamp levelling. Engine quick warm-up. Central locking. Cigarette lighter. DPD, EVSC and ASR control. Hazard warning lights. Kenwood DAB radio with Bluetooth (Sat Nav option available).

Warning/Indicator Lamps	
Features:	Battery charge. Oil pressure. Low fuel. Glow plug operation. High beam and indicators. Park brake warning. Fuel/water separator. Check engine. Engine over heat. EVSC. ABS. Front and rear fog lights. Seat belt warning. Brake fluid level. SRS air bag. Brake vacuum loss. DPD operation.

Tool Kit	
Features:	Jack with a small selection of hand tools.

SAFETY & SECURITY

R29 cab strength:	Complies with ECE-R29 cab strength standard.
Central locking:	Central locking with remote keyless entry and immobiliser.
Rear bumper:	Aluminium rear under run bar.
Seatbelts:	Red diagonal and lap belts.

N35.125(T) Utilitruck spec sheet:

N35.125(T) Utilitruck spec sheet: 11/2019

WARRANTY

All chassis cabs come with a 3 year unlimited mileage warranty and roadside assistance as standard. Tipper bodies come with the bodybuilder's three year, 100,000 mile warranty. Terms and conditions apply.

Isuzu-backed Repair and Maintenance contracts available upon request.

For further information please contact your local dealer or phone us direct:

01707 282930 | www.isuzutruck.co.uk

