

Chassis Cab



### specifications:

# ISUZU 'Forward' N75.190 7.5T GVW / EURO VI-D (Manual transmission) 4x2 rigid

9-0

BAR STATE

CW

BW

a min a

Nº 6ª ST /

AW

THH

To wat



29 4

ROH

EH

Ť

WB

OAL

AL. TH

FOH

UK standard vehicle plated weights (kg) UK Axle design weights (kg)	GVW GTW (Standard) GTW (Optional) Front	7500 8250 11000 3100	7500 8250 11000 3100	7500 8250 11000 3100					
					Rear	5800	5800	5800	
					Weights (kg) Provisional				
					Cab type		day	day	day
	Wheelbase	WB	3365	3815	4475				
Vehicle Mass Unladen	Front	1812	1852	1918					
	Rear	1036	1026	1010					
Total		2848	2878	2928					
GVW		7500	7500	7500					
Body & Payload Allowance		4652	4622	4572					
Max. Permissible Trailer Weight		3500	3500	3500					
Dimensions (mm)									
Overall Length	OAL	6040	6690	7870					
Overhang - Front	FOH	1110	1110	1110					
Overhang - Rear	ROH	1560	1760	2280					
Cab Gap	СВ	170	170	170					
C/L Front Axle to Rear of Cab	CA	550	550	550					
Recommended Body Length	BL	4267	4876	6096					
Chassis Frame Width		850	850	850					
Recommended Body Width		2345	2345	2500					
Recommended Maximum Body Width		2500*	2500*	2500					
Cab Width	OW	2040	2040	2040					
Overall Height (Unladen)	OH	2265	2265	2265					
Chassis Height (Unladen)	EH	830	830	840					
Minimum Road Clearance	HH	190	190	190					
Track - Front	AW	1680	1680	1680					
Track - Rear	CW	1650	1650	1650					
Rear Axle Width	BW	2129	2129	2129					

#### \*Wide mirror arms apply at extra cost.

1. Unladen weights excludes driver, fuel, AdBlue<sup>®</sup>. Includes spare wheel + carrier (Tolerance +/- 3%). 2. Body lengths are given as a guide only. Bodybuilders are responsible for ensuring all legal requirements are met. 3. Maximum body lengths are calculated to remain within the overhang ratio of 60% of the wheel base. Cab gaps may vary. 4. Isuzu Truck (UK) Ltd. shall have no liability whatsoever should the information supplied have incorrect data, descriptions or illustrations.

### N75.190 Mechanical Specification (standard equipment)

Stereo camera monitor, alerts driver with a warning buzzer and LCD monitor.

Utilizes stereo camera system to reduce collion damage.

## FURO VI-D

Recirculating ball type with full integral

hydraulic power assistance. Tilt and

Speedometer with odometer & trip.

coolant temperature. Multi-information

servicing, emissions and fuel economy.

Rev counter. Fuel gauge. Engine

display provides information on

Combination stalk incorporating

headlamps, indicators, fog lamps,

washers and wipers, and exhaust brake.

Steering wheel horn. Engine idle control.

Cigarette lighter. Reverse warning. DPD.

vehicle speed limiter set at 56 mph (90

kph). Hazard warning lights. Kenwood

Battery charge. Oil pressure. Low fuel.

Glow plug operation. High beam and

Engine overheat. AdBlue® level. EVSC,

LDWS, ABS, Exhaust brake operation.

Brake fluid level. SRS air bag. Brake

indicators. Park brake warning. Fuel/water

separator. Check engine. DPD operation.

Front and rear fog lights. Seatbelt warning.

Jack with a small selection of hand tools.

EVSC. ASR and LDWS control. Electronic

DAB radio with Bluetooth (Sat Nav option


Headlamp levelling. Engine quick warm up.

Digital Tachograph.

available).

vacuum loss

telescopic steering column.

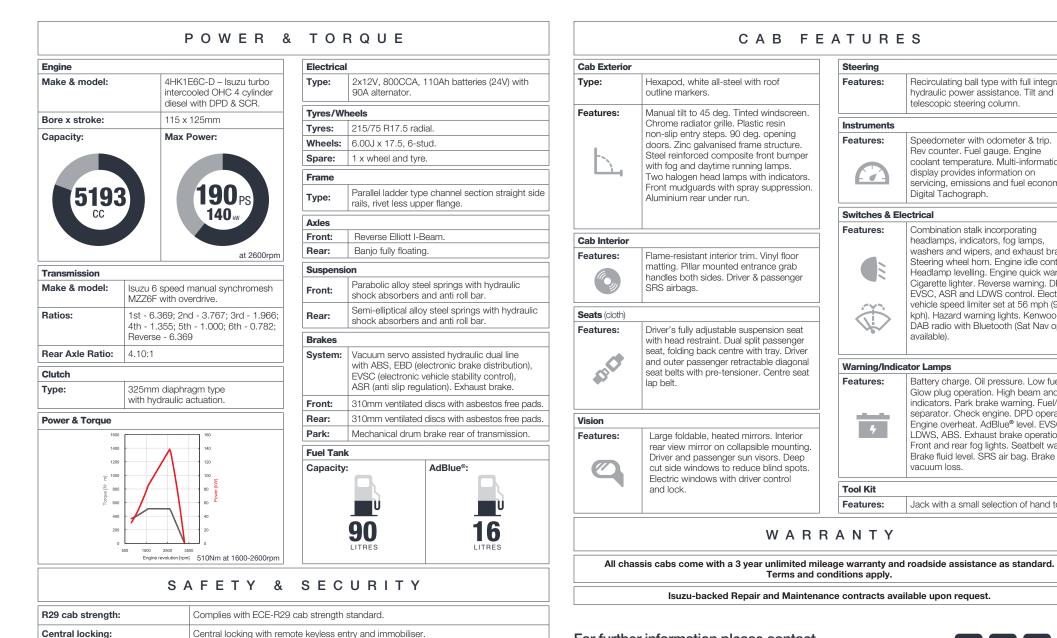

For further information please contact vour local dealer or phone us direct:



01707 282930 | www.isuzutruck.co.uk

N75.190 spec sheet: 19976, 19978, 19980 N75.190 spec sheet: 10/2019

Lane departure warning system:

Advanced Emergency Braking

System (AEBS):